

R With prism for pipes and curved surfaces
Lifts pipes from 25 mm to 200 mm in diameter


- 1** Only 1.8 kg dead weight
- 2** Max. load-bearing capacity: 90 kg (with 3:1 safety factor)
- 3** 360° rotatable and 180° pivotable load swivel
- 4** Easy one-handed operation



- Lifts pipes from 25 mm to 200 mm in diameter
- Outstanding performance on thin-walled materials (operable from just 1 mm)
- 360° rotatable and 180° pivotable load swivel—even under full load
- Wear-resistant magnetic contact area made of hardened steel with TiN-coating preventing damages and guaranteeing a long lifetime

Technical data TML 90 R:

- Dead weight: 1.8 kg
- Breakaway force: 270 kg (on 6 mm steel S 235)
- Max. load-bearing capacity with round pipes: 20 - 50 % of the load-bearing capacity on flat material (see TML 100), depending on pipe diameter and material thickness
- Length: 82.5 mm; width: 80 mm;
height (load swivel in horizontal position): 88 mm
height (load swivel in vertical position): 150 mm

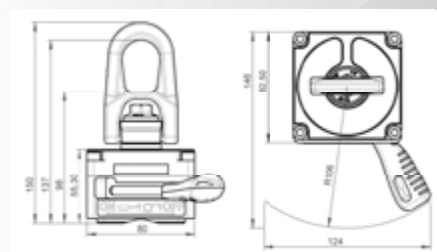

Prod.-No.

ALFRA TML 90 R

41100.L.R