


- For "Sub-Min-D" multiple plug connectors - for sheet steel (S235) and stainless steel
- For punching out the cutout for 9-50-pole plug connectors.
Anti-rotation axles for punches and dies are used as draw bolts.
- All hole punches are fitted with side ejection for the waste piece. No jamming in the die.
- The hole punches are supplied in heavy duty, practical plastic cases.



Prod.-No. 01369

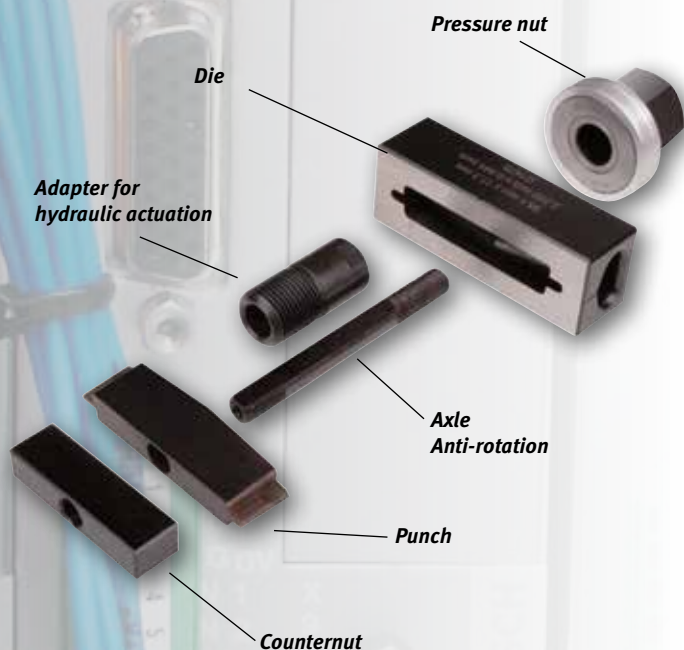

Size in mm	Max. Material thickness in mm (S235)/VA	Number of poles	For use in	pre-drilling in mm	incl. 1 - 4			
					draw bolt	counternut or bridge	Ball bearing pressure nut	Adapter for hydraulic

Hole punch Sub-Mini-D - rectangular

						Prod.-No.			
19.8 x 11.3	2.0 x 1.5	9-pole	●	●	10	01366	01438	01442	01352
28.2 x 11.3	2.0 x 1.5	15-pole	●	●	10	01367		01443	
41.9 x 11.3	1.75 x 1.25	25-pole	●	●	10	01368		01447	
58.4 x 11.3	1.75 x 1.25	37-pole	●	●	10	01369		01444	
55.7 x 13.9	1.65 x 1.0	50-pole	●	●	10	01370		01445	
									01353