




995 VULCAN™ The Next Generation



Patented



- 3 Solid acrylic shockproof vials, including:

- 1 Plumb Site® Dual-View™ vial
- 1 Magnified horizontal vial
- 1 Vertical vial

- Accuracy: <0.5mm/m (0.0005 in/in)

- 2 finely milled surfaces (up to 120cm /48")

- V-Groove for pipe measurements

- Reinforced profile

- Ergonomic handle

- Shock absorbing rubber end caps




Optional

- Magnetic model: 995M

- 12 piece display

Inch	24	32	36	40	48	60	72	80
Centimeter	60	80	90	100	120	150	180	200

985 XL APOLLO™ Heavy-Duty Professional Box Level



Patented



- 3 Solid acrylic shockproof vials, including:

- 1 Plumb Site® Dual-View™ vial
- 1 Magnified horizontal vial
- 1 Vertical vial

- Accuracy: <0.5mm/m (0.0005 in/in)

- 2 finely milled surfaces (up to 120cm /48")

- Ergo Grip™ non-slip handle

- Shock absorbing rubber end caps




Optional

- Magnetic model: 985M

- 12 piece display

Inch	16	20	24	32	40	48	60	72	80	96
Centimeter	40	50	60	80	100	120	150	180	200	250

789P GENESIS™ Contractor Box Level



0.5mm/m (0.0005in/in.)



- 2 to 3 Solid acrylic epoxy locked vials, including:
 - 1 Plumb Site® Dual-View™ vial
 - 1 horizontal vial with gradient lines up to 2%
- Accuracy: <0.5mm/m (0.0005 in/in)
- Milled surface (up to 120cm /48")
- Shock absorbing rubber end caps

Optional

- Magnetic Plumb Site® model: 789PM
- Without Plumb Site® model: 789, 789M
- Lightweight model: 789L
- 12 & 24 piece display

Inch	12	16	20	24	32	40	48	60	72	80	96
Centimeter	30	40	50	60	80	100	120	150	180	200	250

770 EXODUS™ The Ruler in Levels



0.5mm/m (0.0005in/in.)

- 3 Solid acrylic shockproof vials, including:
 - 1 horizontal vial with gradient lines up to 2%
 - 1 Vertical vial
 - 1 45° vial
- Accuracy: <0.5mm/m (0.0005 in/in)
- Finely milled surface (up to 120cm /48")
- Wall grip feature
- Shock absorbing rubber end caps

Optional

- 12 piece cardboard display

Inch	24	32	40	48	60	72
Centimeter	60	80	100	120	150	180

977 NEPTUNE™



- 3 Solid acrylic shockproof vials, including:
 - 1 horizontal vial with gradient lines up to 2%
 - 2 horizontal vials
- Accuracy: <0.5mm/m (0.0005 in/in)
- Finely milled surface (up to 120cm /48")
- Shock absorbing rubber end caps

Optional

- Magnetic model: 977M

Inch	16	24	32	40	48
Centimeter	40	60	80	100	120

779 SPIRIT™



- 2-3 Solid shockproof acrylic vials
- Accuracy: <0.5mm/m (0.0005 in/in)
- Milled surface (up to 120cm /48")
- Wall-grip feature
- Shock absorbing rubber end caps

Optional

- Magnetic model: 779M
- 30 piece dispenser display (20cm/8")

Inch	8	12	16	20	24	32	40	48	60	72	80
Centimeter	20	30	40	50	60	80	100	120	150	180	200

730 TOPCAST™ The Toughest Cast Level at the Very Best Price




0.5mm/m (0.0005in/in.)

- 2 Solid acrylic vials, including:
 - 1 horizontal
 - 1 vertical
- Accuracy: <0.5mm/m (0.0005 in/in)
- Milled surface
- 2 Heavy-duty cast aluminum “anvil” strike pads
- Drill bit diameter gauge

Inch	24	32
Centimeter	60	80
	750g	890g

820 SUPERCAST™



0.5mm/m (0.0005in/in.)

- 3 Solid acrylic vials, including:
 - 1 adjustable horizontal with gradient lines up to 2%
 - 2 vertical
- Accuracy: <0.5mm/m (0.0005 in/in)
- 2 Milled surfaces
- Heavy-duty cast aluminum body

Inch	24	32
Centimeter	60	80
	790g	990g

920 SHARK®



0.5mm/m (0.0005in/in.)

Patented

- 2 Solid acrylic vials, including:
 - 1 Plumb Site® Dual-View™ vial
 - 1 epoxy locked horizontal vial with gradient lines up to 2%
- Accuracy: <0.5mm/m (0.0005 in/in)
- Milled surface
- Heavy-duty cast aluminum tapered (trapezoid) body
- Shock absorbing rubber “anvils”

Optional

- Magnetic model: 920M

Inch	16	20	24	32	40
Centimeter	40	50	60	80	100
	320g	390g	470g	630g	770g

929 TOOLBOX LEVEL 25cm (10")



Patented

 140g

- 3 cylindrical vials, including: Horizontal, vertical and 45°
- Leveling ledge for tiles/sills
- Magnetic V-groove for pipe/conduit
- Sturdy aluminum frame and base

Optional:

- 12 piece display (p.94)

227 TORPEDO STAR PLUS 23cm (9")



 100g



- 3 cylindrical vials, including: Horizontal, vertical and 45°
- V-groove for pipes/conduit
- Magnetic base

- Rubber end caps

Optional: 20 piece display (p.94)

229 TORPEDO LEVEL 23cm (9")



 90g





- 3 Cylindrical vials, including: Horizontal, vertical and 45°
- V-groove for pipe/conduit
- Magnetic base

Optional:

- 20 piece display (p.94)

773 DRYWALL LEVEL 90cm (36")

Magnetic stud layout level

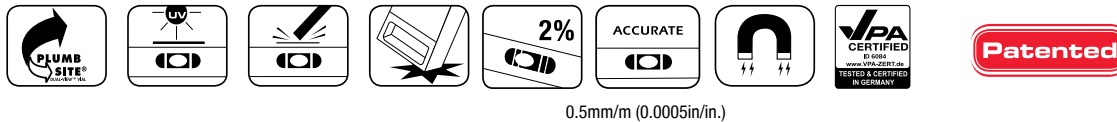

0.5mm/m (0.0005in/in.)


- 2 Solid acrylic shockproof vials including:
 - 1 Plumb Site® Dual-View™ vial
 - 1 Horizontal vial with gradient lines 2%
- Accuracy: <0.5mm/m (0.0005 in/in)
- Milled surface
- Magnetic stud slots and markers at 40cm and 60cm
- Rare-earth magnets
- Tough aluminum box level profile

Optional:

- Model 773: Standard stud layout 400mm/600mm/40mm
- Model 773B: Standard stud layout 400mm/600mm/50mm
- Model 773G: Standard stud layout 417mm/625mm/50mm

783 ELECTRICIAN'S LEVEL

Perfectly positioned power sockets



0.5mm/m (0.0005in/in.)

- 2 Solid acrylic shockproof vials, including:
 - Vertical and Horizontal vials
- Accuracy: <0.5mm/m (0.0005 in/in)
- 3-4 Markers at 71mm intervals
- 1 marker at 91mm (on 120cm /130cm model)

- 3 Height markers: 30cm, 105cm and 115cm
- Tough aluminum box level profile

Centimeter	43	47
	120	130

992





DIGITAL BEVEL

25cm (10")

Precise Angle Mesurer and Level







- 1 Horizontal vial
 - Digital accuracy: <0.1°
 - Clear digital display
 - 180° Readout – Readable, when level is inverted
 - Adjustable blade locks at any angle
- Easy recalibration
 - Reference angle “False Zero”
 - Anodized aluminum profile

103

INCLINOMETER

Gradient Level

13cm (5.1")











- 1 Horizontal solid acrylic vial
 - Accuracy: <0.5mm/m (0.0005 in/in)
 - Scale in degrees and percentages

Optional

- Magnetic model: 103M

Inch	8	12	16	20	24	32	40	48
Centimeter	20	30	40	50	60	80	100	120