

Pro Preset Torque Screwdrivers

Torque range from 0.05 to 13.5 N.m

Versatile Preset Torque Application Screwdrivers for any manufacturing environment

- These tools complement our traditional accuracy, durability and quality with the benefits of a moulded plastic body and enhanced ergonomic design
- Durable, versatile and lightweight tools that can be used for Assembly, Maintenance and Servicing in any engineering or manufacturing environment
- Pro 450 and 1350 models come with T-Bars as standard to assist with higher torque
- To allow for customisation and clear identification interchangeable coloured end caps are available in packs of four (Order Code: 065800)
- Comprehensive range of Accessories, Bits and Blades. **See pages 88-89**

Slipping Mechanism

Incorrect tightening is impossible



ESD Preset Torque Screwdrivers


Torque range from 0.05 to 13.5 N.m

Preset Torque Application Screwdrivers for electronic component assembly

- The ESD Preset Torque Screwdriver range is ideal for safe electronic component assembly as these tools are EPA compliant
- Tools that complement our traditional accuracy, durability and quality with the benefits of a moulded plastic body and enhanced ergonomic design
- ESD 450 and 1350 models come with T-Bars as standard to assist with higher torque
- To allow for customisation and clear identification interchangeable coloured end caps are available in packs of four (Order Code: 065800)

Slipping Mechanism

Incorrect tightening is impossible

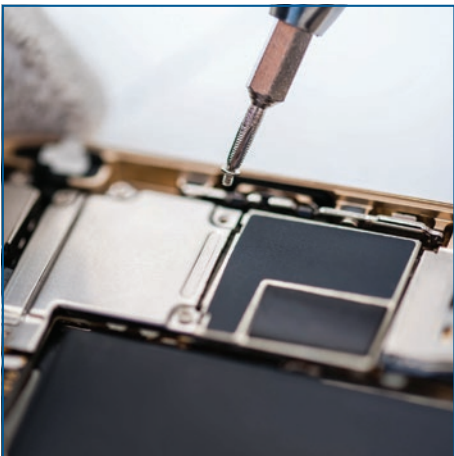

For more information: Tool Selector; gedore-torque.com/tool-selector Telephone; +44 (0) 1483 894 476
Videos; www.youtube.com/gedore-torque Email; salesandrepairs@gedore-torque.com

Want to know how to use this tool?

YouTube

Watch our video

Order Code	Gedore Ref	Model	Range		Drive	k	mm	g	Repeatability	ISO 6789 Class	T-Bar	
			ISO	Imperial								
065400	2927756	Pro 25 FH	0.05 - 0.25 N.m	0.45 - 2.2 lbf.in		132	210	+/- 6%	2F	2F	✗	✗
065500	2927764	Pro 150 FH	0.2 - 1.5 N.m	1.8 - 13 lbf.in		132	210	+/- 6%	2F	2F	✗	✗
065600	2927772	Pro 450 FH	0.5 - 4.5 N.m	4.5 - 40 lbf.in		140	230	+/- 6%	2F	2F	✓	✗
065700	2927780	Pro 1350 FH	2.5 - 13.5 N.m	22 - 120 lbf.in		140	230	+/- 6%	2F	2F	✓	✗
065405	2927799	ESD 25 FH	0.05 - 0.25 N.m	0.45 - 2.2 lbf.in		132	210	+/- 6%	2F	2F	✗	✓
065505	2927802	ESD 150 FH	0.2 - 1.5 N.m	1.8 - 13 lbf.in		132	210	+/- 6%	2F	2F	✗	✓
065605	2927810	ESD 450 FH	0.5 - 4.5 N.m	4.5 - 40 lbf.in		140	230	+/- 6%	2F	2F	✓	✓
065705	2927829	ESD 1350 FH	2.5 - 13.5 N.m	22 - 120 lbf.in		140	230	+/- 6%	2F	2F	✓	✓
065800	Pack of four interchangeable coloured end caps											