


Impact Tools

6.3 (1/4") square drive

K 20 (MM)
IMPACT SOCKET 1/4"

hexagon

- > Acc. to DIN 3129, ISO 2725-2
 - > Machine-operated, suitable for all standard electric and air tools
 - > Square drive as per DIN 3121 - G 6.3, ISO 1174
 - > GEDORE special steel, gun-metal finish
- * not standardised




Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
5.5	23	9.5	13	3	KB 2070, KB 2075	0.016	6198090	K 20 5,5
6.0	23	10.0	13	3	KB 2070, KB 2075	0.016	6198170	K 20 6
7.0	23	11.3	13	3	KB 2070, KB 2075	0.016	6198250	K 20 7
8.0	23	12.5	13	4	KB 2070, KB 2075	0.016	6198330	K 20 8
9.0	23	13.8	13	4	KB 2070, KB 2075	0.017	6198410	K 20 9
10.0	23	15.0	13	5	KB 2070, KB 2075	0.018	6198680	K 20 10
11.0	23	16.3	13	5	KB 2070, KB 2075	0.020	6198760	K 20 11
12.0	23	17.0	13	6	KB 2070, KB 2075	0.023	6198840	K 20 12
13.0	23	18.8	13	6	KB 2070, KB 2075	0.024	6198920	K 20 13
14.0	25	20.0	13	7	* KB 2070, KB 2075	0.035	6199060	K 20 14
17.0	26	23.8	13	7	* KB 2070, KB 2075	0.037	6199140	K 20 17

K 20 (AF)
IMPACT SOCKET 1/4"

hexagon

- > Machine-operated, suitable for all standard electric and air tools
- > Square drive as per DIN 3121 - G 6.3, ISO 1174
- > GEDORE special steel, gun-metal finish



Ø AF	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
3/16	23	8.5	13	3	KB 2070, KB 2075	0.015	6199220	K 20 3/16AF
1/4	23	10.3	13	3	KB 2070, KB 2075	0.017	6199300	K 20 1/4AF
5/16	23	12.5	13	3	KB 2070, KB 2075	0.016	6199490	K 20 5/16AF
3/8	23	15.0	13	4	KB 2070, KB 2075	0.018	6199570	K 20 3/8AF
7/16	23	16.3	13	6	KB 2070, KB 2075	0.021	6199650	K 20 7/16AF

KB 2090
EXTENSION 1/4"

for impact sockets

- > With square drive as per DIN 3121 - G 6.3, ISO 1174
- > GEDORE special steel, gun-metal finish



1/4"	6.3	50	0.026	Code	No.
				6201140	KB 2090-2

KB 2070 - KB 2075
SAFETY RING AND SAFETY PIN

for impact sockets 1/4"



KB 2070



KB 2075


Description	Ø	10	0.005	Code	No.
Safety ring d 9 mm	9.0			6200920	KB 2070
Safety pin d 1.5 mm	1.5	10		6201060	KB 2075

10 (3/8") square drive

K 30 IMPACT SOCKET 3/8"

hexagon

- Acc. to DIN 3129, ISO 2725-2
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 10, ISO 1174
- GEDORE special steel, gun-metal finish
- * not standardised




Ø mm	L	d ₁	d ₂	t		recommended accessories	kg	Code	No.
6	30	11.0	19	3.0	*	KB 3070 6-12, KB 3075 6-12	0.045	6251160	K 30 6
7	30	12.5	19	3.0		KB 3070 6-12, KB 3075 6-12	0.046	6251240	K 30 7
8	30	14.5	19	4.0		KB 3070 6-12, KB 3075 6-12	0.046	6251320	K 30 8
9	30	15.0	19	4.0		KB 3070 6-12, KB 3075 6-12	0.046	6251400	K 30 9
10	30	16.0	19	5.0		KB 3070 6-12, KB 3075 6-12	0.046	6251590	K 30 10
11	30	17.5	19	5.0		KB 3070 6-12, KB 3075 6-12	0.046	6251670	K 30 11
12	30	19.0	19	6.0		KB 3070 6-12, KB 3075 6-12	0.046	6251750	K 30 12
13	30	19.0	22	6.0		KB 3070 13-24, KB 3075 13-24	0.063	6251830	K 30 13
14	30	21.0	22	7.0		KB 3070 13-24, KB 3075 13-24	0.063	6251910	K 30 14
15	30	22.0	22	7.0		KB 3070 13-24, KB 3075 13-24	0.062	6252050	K 30 15
16	30	24.0	22	8.0		KB 3070 13-24, KB 3075 13-24	0.066	6252130	K 30 16
17	30	25.0	22	9.0		KB 3070 13-24, KB 3075 13-24	0.068	6252210	K 30 17
18	30	26.0	22	9.0		KB 3070 13-24, KB 3075 13-24	0.075	6252480	K 30 18
19	30	27.5	22	9.5		KB 3070 13-24, KB 3075 13-24	0.076	6252560	K 30 19
20	30	28.0	22	10.0	*	KB 3070 13-24, KB 3075 13-24	0.084	6252640	K 30 20
21	30	30.0	22	11.0	*	KB 3070 13-24, KB 3075 13-24	0.089	6252720	K 30 21
22	30	32.0	23	11.0	*	KB 3070 13-24, KB 3075 13-24	0.093	6252800	K 30 22
23	30	32.0	23	13.0	*	KB 3070 13-24, KB 3075 13-24	0.095	6252990	K 30 23
24	30	35.0	23	13.0	*	KB 3070 13-24, KB 3075 13-24	0.105	6254420	K 30 24

TX K 30 IMPACT SOCKET 3/8"

for protruding TORX® head screws

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 10, ISO 1174
- GEDORE special steel, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Ø	M	mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
E5	M4	4,73	32	9.0	19	5	KB 3070 6-12, KB 3075 6-12	0.042	6265030	TX K 30 E5
E6	M5	5,74	32	10.0	19	5	KB 3070 6-12, KB 3075 6-12	0.044	6265110	TX K 30 E6
E7	M6	6,16	32	10.0	19	7	KB 3070 6-12, KB 3075 6-12	0.044	6265380	TX K 30 E7
E8	M6 - M7	7,52	32	10.5	19	8	KB 3070 6-12, KB 3075 6-12	0.048	6265460	TX K 30 E8
E10	M8	9,42	32	12.5	19	9	KB 3070 6-12, KB 3075 6-12	0.048	6265540	TX K 30 E10
E12	M10	11,17	32	15.0	19	10	KB 3070 6-12, KB 3075 6-12	0.047	6265620	TX K 30 E12
E14	M12	12,90	32	19.0	19	12	KB 3070 6-12, KB 3075 6-12	0.046	6265700	TX K 30 E14

KB 3090 EXTENSION 3/8"

for impact sockets

- > With square drive as per DIN 3121 - G 10, ISO 1174
- > GEDORE special steel, manganese-phosphated



□"	■	↳ mm ▷	⚖	Code	No.
3/8	10	75	0.090	6261710	KB 3090-3
3/8	10	125	0.149	6262010	KB 3090-5
3/8	10	250	0.298	6262280	KB 3090-10

KB 3095 UNIVERSAL JOINT 3/8"

for impact sockets

- > With square drive as per DIN 3121 - G 10, ISO 1174
- > GEDORE special steel, manganese-phosphated



□"	□	■"	■	↳ mm ▷	⚖	Code	No.
3/8	10	3/8	10	50	0.072	6262440	KB 3095

KB 3019 CONVERTOR 3/8" TO 1/2"

for impact sockets

- > With square drive as per DIN 3121 - G 10, ISO 1174
- > GEDORE special steel, manganese-phosphated



3/8" 10 mm 1/2" 12,5 mm

□"	□	■"	■	↳ mm ▷	⚖	Code	No.
3/8	10	1/2	12.5	33	0.061	6263410	KB 3019

KB 3020 REDUCER 3/8" TO 1/4"

for impact sockets

- > With square drive as per DIN 3121 - G 10, ISO 1174
- > GEDORE special steel, manganese-phosphated



3/8" 10 mm 1/4" 6,3 mm

□"	□	■"	■	↳ mm ▷	⚖	Code	No.
3/8	10	1/4	6.3	31	0.034	6263250	KB 3020

KB 3070 - KB 3075 SAFETY RING AND SAFETY PIN

for impact sockets 3/8"



KB 3070



KB 3075

Description	Ø	↳ mm ▷	⚖	Code	No.
Safety ring d 14 mm	14.0		0.002	6260820	KB 3070 6-12
Safety ring d 15.5 mm	15.5		0.002	6260900	KB 3070 13-24
Safety pin d 2.5 mm	2.5	14	0.005	6261040	KB 3075 6-12
Safety pin d 2.5 mm	2.5	16	0.002	6261120	KB 3075 13-24

12.5 (1/2") square drive

K 19-028

IMPACT SOCKET SET 1/2"

5 pieces

- 5 impact sockets, machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, gun-metal finish
- In black plastic case

12.5
1/2"

K 19 LS-004

IMPACT SOCKET SET 1/2"

4 pieces

- 4 impact sockets with protective sleeve, hexagon, long pattern
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- Thin-walled to protect the alloy wheels
- GEDORE special steel, manganese-phosphated

12.5
1/2"

Sockets		Code	No.
○ 10 13 17 19 24	0.749	1646923	K 19-028


Sockets		Code	No.
○ K 19 LS 17 19 21 22	0.980	2790831	K 19 LS-004

K 19 (MM)

IMPACT SOCKET 1/2"

hexagon

- Acc. to DIN 3129, ISO 2725-2
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, gun-metal finish
- * not standardised

12.5
1/2"


mm	L	d ₁	d ₂	t	recommended accessories		Code	No.
10	38	17.0	25	5.0	KB 1970 10-14, KB 1975 10-14	0.082	6160280	K 19 10
11	38	19.0	25	5.0	KB 1970 10-14, KB 1975 10-14	0.085	6160360	K 19 11
12	38	20.0	25	6.0	KB 1970 10-14, KB 1975 10-14	0.084	6160440	K 19 12
13	38	21.0	25	6.0	KB 1970 10-14, KB 1975 10-14	0.081	6160520	K 19 13
14	38	22.0	25	7.0	KB 1970 10-14, KB 1975 10-14	0.082	6160600	K 19 14
15	38	24.0	30	7.0	KB 1970 15-27, KB 1975 15-27	0.125	6161680	K 19 15
16	38	25.0	30	8.0	KB 1970 15-27, KB 1975 15-27	0.124	6160790	K 19 16
17	38	26.0	30	9.0	KB 1970 15-27, KB 1975 15-27	0.123	6160870	K 19 17
18	38	27.5	30	9.0	KB 1970 15-27, KB 1975 15-27	0.122	6160950	K 19 18
19	38	27.5	30	9.5	KB 1970 15-27, KB 1975 15-27	0.119	6161090	K 19 19
21	38	30.0	30	11.0	KB 1970 15-27, KB 1975 15-27	0.137	6161170	K 19 21
22	38	32.0	30	11.0	KB 1970 15-27, KB 1975 15-27	0.142	6161250	K 19 22
23	38	32.0	30	13.0	* KB 1970 15-27, KB 1975 15-27	0.148	6161330	K 19 23
24	45	35.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.154	6161410	K 19 24
27	50	38.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.180	6182680	K 19 27
30	50	41.0	30	16.0	* KB 1970 15-27, KB 1975 15-27	0.256	1560557	K 19 30
32	50	44.0	30	17.0	* KB 1970 15-27, KB 1975 15-27	0.286	1783742	K 19 32

K 19 (AF)

IMPACT SOCKET 1/2"

hexagon

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, gun-metal finish




mm AF	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
3/8	38	16.0	25	4.0	KB 1970 10-14, KB 1975 10-14	0.079	6166990	K 19 3/8AF
7/16	38	18.0	25	6.0	KB 1970 10-14, KB 1975 10-14	0.079	6162300	K 19 7/16AF
1/2	38	20.0	25	6.0	KB 1970 10-14, KB 1975 10-14	0.078	6162650	K 19 1/2AF
9/16	38	22.0	25	7.0	KB 1970 10-14, KB 1975 10-14	0.080	6163030	K 19 9/16AF
5/8	38	25.0	25	8.0	KB 1970 15-27, KB 1975 15-27	0.121	6163460	K 19 5/8AF
11/16	38	25.0	25	9.0	KB 1970 15-27, KB 1975 15-27	0.121	6163700	K 19 11/16AF
3/4	38	27.5	30	9.5	KB 1970 15-27, KB 1975 15-27	0.115	6163970	K 19 3/4AF
13/16	38	30.0	30	11.0	KB 1970 15-27, KB 1975 15-27	0.131	6168420	K 19 13/16AF
7/8	38	32.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.141	6169820	K 19 7/8AF
15/16	38	35.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.156	6164190	K 19 15/16AF
1	38	35.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.169	6169900	K 19 1AF
1.1/16	50	38.0	30	13.0	KB 1970 15-27, KB 1975 15-27	0.173	6164350	K 19 1.1/16AF
1.1/8	40	38.0	30	16.5	KB 1970 15-27, KB 1975 15-27	0.180	6164510	K 19 1.1/8AF
1.1/4	40	44.0	35	17.0	KB 1970 15-27, KB 1975 15-27	0.284	6165240	K 19 1.1/4AF
1.5/16	43	45.0	35	19.0	KB 1970 15-27, KB 1975 15-27	0.296	6165320	K 19 1.5/16AF

K 19 L

IMPACT SOCKET 1/2"

hexagon, long pattern

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, manganese-phosphated




mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
8	77	15.3	25	12	KB 1970 10-14, KB 1975 10-14	0.124	6163110	K 19 L 8
10	77	17.8	25	12	KB 1970 10-14, KB 1975 10-14	0.140	6163380	K 19 L 10
13	77	21.5	25	13	KB 1970 10-14, KB 1975 10-14	0.158	6163540	K 19 L 13
14	77	22.8	25	13	KB 1970 10-14, KB 1975 10-14	0.171	6163620	K 19 L 14
16	77	24.0	30	14	KB 1970 15-27, KB 1975 15-27	0.208	6197790	K 19 L 16
17	80	26.5	30	15	KB 1970 15-27, KB 1975 15-27	0.230	6163890	K 19 L 17
18	82	27.8	30	15	KB 1970 15-27, KB 1975 15-27	0.255	6197870	K 19 L 18
19	82	29.0	30	17	KB 1970 15-27, KB 1975 15-27	0.265	6164000	K 19 L 19
21	82	31.5	30	17	KB 1970 15-27, KB 1975 15-27	0.306	6162730	K 19 L 21
22	82	32.8	30	19	KB 1970 15-27, KB 1975 15-27	0.318	6164270	K 19 L 22
23	82	34.0	30	19	KB 1970 15-27, KB 1975 15-27	0.328	6199810	K 19 L 23
24	82	35.3	30	21	KB 1970 15-27, KB 1975 15-27	0.358	6164430	K 19 L 24
27	82	39.0	30	22	KB 1970 15-27, KB 1975 15-27	0.396	6164780	K 19 L 27

K 19 LS

IMPACT SOCKET 1/2" WITH PROTECTIVE SLEEVE

hexagon, long pattern

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- Thin-walled to protect the alloy wheels
- GEDORE special steel, manganese-phosphated




Ø mm	Colour	RAL	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
17	Traffic blue	5017	81	27.0	30	15	KB 1970 15-27, KB 1975 15-27	0.200	2178214	K 19 LS 17
19	Traffic green	6024	82	29.0	30	17	KB 1970 15-27, KB 1975 15-27	0.210	2178222	K 19 LS 19
21	Traffic red	3020	82	30.5	30	17	KB 1970 15-27, KB 1975 15-27	0.230	2178230	K 19 LS 21
22	Traffic yellow	1023	82	32.3	30	19	KB 1970 15-27, KB 1975 15-27	0.260	2178249	K 19 LS 22

KR 19

IMPACT SOCKET 1/2"

hexagon, for cars

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, gun-metal finish




Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
17	38	30	30	14	KB 1970 15-27, KB 1975 15-27	0.174	6162490	KR 19 17
19	38	33	30	18	KB 1970 15-27, KB 1975 15-27	0.186	6162570	KR 19 19

ITX K 19

IMPACT SCREWDRIVER BIT SOCKET 1/2"

for recessed TORX® head screws

- Square drive as per DIN 3121 - G 12.5, ISO 1174
- GEDORE special steel, manganese-phosphated
- TORX® = reg. trademark of Acument Intellectual Properties, LLC, USA



Ø	M	mm	L ₁	L ₂	d	recommended accessories	kg	Code	No.
T30	M6 - M7	5,52	47	26	25	KB 1970 10-14, KB 1975 10-14	0.075	6197280	ITX K 19 T30
T40	M7 - M8	6,65	47	26	25	KB 1970 10-14, KB 1975 10-14	0.077	6197360	ITX K 19 T40
T45	M8 - M10	7,82	47	26	25	KB 1970 10-14, KB 1975 10-14	0.078	1603124	ITX K 19 T45
T50	M10	8,83	47	26	25	KB 1970 10-14, KB 1975 10-14	0.079	6197440	ITX K 19 T50
T55	M12	11,22	47	26	25	KB 1970 10-14, KB 1975 10-14	0.084	6197520	ITX K 19 T55
T60	M14	13,25	47	26	25	KB 1970 10-14, KB 1975 10-14	0.088	6197600	ITX K 19 T60




TX K 19

IMPACT SOCKET 1/2"

for protruding TORX® head screws

- › Machine-operated, suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - G 12.5, ISO 1174
- › GEDORE special steel, gun-metal finish
- › TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



	 M	 mm	L	d ₁	d ₂	t	recommended accessories	 kg	Code	No.
E10	M8	9,42	38	15.0	25	9	KB 1970 10-14, KB 1975 10-14	0.084	6223110	TX K 19 E10
E12	M10	11,17	38	16.0	25	10	KB 1970 10-14, KB 1975 10-14	0.085	6223380	TX K 19 E12
E14	M12	12,90	38	18.5	25	12	KB 1970 10-14, KB 1975 10-14	0.086	6223460	TX K 19 E14
E16	M12	14,76	38	20.0	25	12	KB 1970 10-14, KB 1975 10-14	0.088	6223540	TX K 19 E16
E18	M14	16,70	38	22.0	25	12	KB 1970 10-14, KB 1975 10-14	0.087	6223620	TX K 19 E18
E20	M16	18,45	38	25.0	30	13	KB 1970 15-27, KB 1975 15-27	0.140	6223700	TX K 19 E20
E24	M18 - M20	22,16	45	28.5	30	17	KB 1970 15-27, KB 1975 15-27	0.137	6223890	TX K 19 E24

IN K 19

IMPACT SCREWDRIVER BIT SOCKET 1/2"

for in-hex screws


- › Suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - G 12.5, ISO 1174
- › GEDORE special steel, manganese-phosphated



IN K 19 5



IN K 19 17



 mm	L ₁	L ₂	d	recommended accessories	 kg	Code	No.
5	44	7.5	25	KB 1970 10-14, KB 1975 10-14	0.073	6223970	IN K 19 5
6	44	9.0	25	KB 1970 10-14, KB 1975 10-14	0.072	6224000	IN K 19 6
8	44	11.0	25	KB 1970 10-14, KB 1975 10-14	0.077	6224190	IN K 19 8
10	44	13.0	25	KB 1970 10-14, KB 1975 10-14	0.079	6224270	IN K 19 10
12	50	15.0	30	KB 1970 15-27, KB 1975 15-27	0.136	6224350	IN K 19 12
14	50	17.0	30	KB 1970 15-27, KB 1975 15-27	0.144	6225320	IN K 19 14
17	50	19.0	30	KB 1970 15-27, KB 1975 15-27	0.157	6225670	IN K 19 17

KB 1930

REDUCER 1/2" TO 3/8"

for impact sockets

- › With square drive as per DIN 3121 - G 12.5, Form F, G, and H
- › GEDORE special steel, manganese-phosphated



□"	□	■"	■	↳ mm	⚖	Code	No.
1/2	12.5	3/8	10	44	0.081	6650370	KB 1930

KB 1932

CONVERTOR 1/2" TO 3/4"

for impact sockets

- › With square drive as per DIN 3121 - G 12.5, Form F, G, and H
- › GEDORE special steel, manganese-phosphated



□"	□	■"	■	↳ mm	⚖	Code	No.
1/2	12.5	3/4	20	44	0.146	6650020	KB 1932

KB 1990

EXTENSION 1/2"

for impact sockets

- › With square drive as per DIN 3121 - G 12.5, ISO 1174 Form F, G, and H
- › GEDORE special steel, manganese-phosphated



KB 1990-5



KB 1990-10

■"	■	↳ mm	⚖	Code	No.
1/2	12.5	125	0.256	6655250	KB 1990-5
1/2	12.5	250	0.461	6650100	KB 1990-10

KB 1995

UNIVERSAL JOINT 1/2"

for impact sockets

- › With square drive as per DIN 3121 - G 12.5, Form F, G, and H
- › GEDORE special steel, manganese-phosphated



■"	■	□"	□	↳ mm	⚖	Code	No.
1/2	12.5	1/2	12.5	62	0.202	6655410	KB 1995

KB 1970 - KB 1975

SAFETY RING AND SAFETY PIN

for impact sockets 1/2"



KB 1970



KB 1975

Description	Ø	↳ mm	⚖	Code	No.
Safety ring d 19 mm	19		0.002	6654790	KB 1970 10-14
Safety ring d 24 mm	24		0.002	6654870	KB 1970 15-27
Safety pin d 3 mm	3	20	0.002	6654950	KB 1975 10-14
Safety pin d 3 mm	3	25	0.002	6655090	KB 1975 15-27

20 (3/4") square drive

K 32-040

IMPACT SOCKET SET 3/4" FOR TRUCKS

4 pieces

- › 4 sockets, machine-operated, suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - H 20, ISO 1174
- › GEDORE special steel, gun-metal finish
- › In black plastic case



Sockets

O 24 27 30 33



1.630

Code

1828142

No.


K 32-040

K 32 S

IMPACT SOCKET 3/4"
WITH IMPACT-FIX LOCK

hexagon UD profile

- › Acc. to DIN 3129, ISO 2725-2
- › Machine-operated, suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - H 20, ISO 1174
- › GEDORE vanadium steel 59CrV4
- › Gun-metal finish
- › DBGm (German utility patent)
- › Particularly suitable for working in sensitive areas permanently governed by certainty against loss, process reliability and occupational safety
- › Examples: overhead power line construction, wind power plants or the automotive sector




mm	L	d ₁	d ₂	t	kg	Code	No.
17	45	31.1	44	7.0	0.400	2734060	K 32 S 17
18	45	32.4	44	8.4	0.420	2734079	K 32 S 18
19	45	33.6	44	8.4	0.400	2734095	K 32 S 19
22	46	37.4	44	9.8	0.400	2734176	K 32 S 22
24	46	39.9	44	11.2	0.340	2734184	K 32 S 24
27	48	43.6	44	12.6	0.400	2734206	K 32 S 27
30	52	47.4	44	14.0	0.400	2734214	K 32 S 30
32	52	49.9	44	15.4	0.400	2734230	K 32 S 32
33	54	51.0	44	15.4	0.400	2734257	K 32 S 33
34	54	52.4	44	15.4	0.400	2734265	K 32 S 34
36	56	54.9	44	16.8	0.500	2734273	K 32 S 36
38	59	57.0	44	16.8	0.500	2734281	K 32 S 38
41	59	61.1	44	18.9	0.560	2734303	K 32 S 41

K 32 SL

IMPACT SOCKET 3/4"
WITH IMPACT-FIX LOCK

hexagon UD profile, long pattern

- › Machine-operated, suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - H 20, ISO 1174
- › GEDORE vanadium steel 59CrV4
- › Gun-metal finish
- › DBGm (German utility patent)
- › Particularly suitable for working in sensitive areas permanently governed by certainty against loss, process reliability and occupational safety
- › Examples: overhead power line construction, wind power plants or the automotive sector




mm	L	d ₁	d ₂	t	kg	Code	No.
17	90	31.1	44	7.0	0.560	2734311	K 32 SL 17
19	90	32.4	44	8.4	0.600	2734338	K 32 SL 19
21	90	36.1	44	9.8	0.600	2734346	K 32 SL 21
22	90	37.4	44	9.8	0.620	2734354	K 32 SL 22
24	90	39.9	44	11.2	0.620	2734362	K 32 SL 24
27	90	43.6	44	12.6	0.600	2734370	K 32 SL 27
30	90	47.4	44	14.0	0.600	2734389	K 32 SL 30
32	90	49.9	44	15.4	0.700	2734397	K 32 SL 32
33	90	51.0	44	15.4	0.800	2734400	K 32 SL 33
34	90	52.4	44	15.4	0.800	2734419	K 32 SL 34
36	90	54.9	44	16.8	0.800	2734427	K 32 SL 36
41	90	61.1	44	18.9	0.980	2734435	K 32 SL 41

K 32 (MM)

IMPACT SOCKET 3/4"

hexagon

- Acc. to DIN 3129, ISO 2725-2
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 20, ISO 1174
- GEDORE special steel, gun-metal finish
- * not standardised



Ø mm	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
17	50	29	44	9.0	KB 3270, KB 3275	0.300	6282040	K 32 17
18	50	32	44	9.0	KB 3270, KB 3275	0.300	6289990	K 32 18
19	50	32	44	9.5	KB 3270, KB 3275	0.293	6282120	K 32 19
22	50	38	44	11.0	KB 3270, KB 3275	0.345	6282200	K 32 22
24	50	40	44	13.0	KB 3270, KB 3275	0.339	6282390	K 32 24
27	54	41	44	13.0	KB 3270, KB 3275	0.339	6282470	K 32 27
30	54	44	44	16.5	KB 3270, KB 3275	0.352	6282550	K 32 30


Ø mm	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
32	56	49	44	17.0	KB 3270, KB 3275	0.407	6282630	K 32 32
33	56	49	44	17.0	* KB 3270, KB 3275	0.430	6283010	K 32 33 (3/4W)
34	56	52	44	19.0	KB 3270, KB 3275	0.475	6281580	K 32 34
36	56	52	44	19.0	KB 3270, KB 3275	0.444	6282710	K 32 36
38	58	54	44	22.0	* KB 3270, KB 3275	0.481	6281740	K 32 38
41	58	57	44	22.0	KB 3270, KB 3275	0.500	6282980	K 32 41

K 32 (AF)

IMPACT SOCKET 3/4"

hexagon

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 20, ISO 1174
- GEDORE special steel, gun-metal finish



Ø "AF"	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
13/16	46	35	44	11.0	KB 3270, KB 3275	0.349	6285300	K 32 13/16AF
7/8	46	38	44	13.0	KB 3270, KB 3275	0.354	6284410	K 32 7/8AF
15/16	46	40	44	13.0	KB 3270, KB 3275	0.342	6284680	K 32 15/16AF
1	46	41	44	13.0	KB 3270, KB 3275	0.340	6285490	K 32 1AF
1.1/16	48	41	44	13.0	KB 3270, KB 3275	0.347	6285650	K 32 1.1/16AF
1.1/8	52	44	44	16.5	KB 3270, KB 3275	0.367	6284760	K 32 1.1/8AF
1.1/4	52	49	44	17.0	KB 3270, KB 3275	0.418	6284840	K 32 1.1/4AF
1.5/16	55	49	44	19.0	KB 3270, KB 3275	0.417	6284920	K 32 1.5/16AF


Ø "AF"	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
1.3/8	55	52	44	19.0	KB 3270, KB 3275	0.452	6285730	K 32 1.3/8AF
1.7/16	56	52	44	19.0	KB 3270, KB 3275	0.439	6285060	K 32 1.7/16AF
1.1/2	59	54	44	22.0	KB 3270, KB 3275	0.480	6285140	K 32 1.1/2AF
1.5/8	59	57	44	22.0	KB 3270, KB 3275	0.497	6285810	K 32 1.5/8AF
1.11/16	64	63	44	25.0	KB 3270, KB 3275	0.674	6286030	K 32 1.11/16AF
1.3/4	64	63	44	25.5	KB 3270, KB 3275	0.639	6286110	K 32 1.3/4AF
1.7/8	67	67	54	27.0	KB 3270, KB 3275	0.873	6286380	K 32 1.7/8AF
2	67	73	54	27.0	KB 3270, KB 3275	0.995	6286460	K 32 2AF

K 32 L

IMPACT SOCKET 3/4"

hexagon, long pattern

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 20, ISO 1174
- GEDORE special steel, gun-metal finish




Ø mm	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
17	90	29	44	9.0	KB 3270, KB 3275	0.727	6283600	K 32 L 17
19	95	32	44	9.5	KB 3270, KB 3275	0.720	6283790	K 32 L 19
21	95	35	44	11.0	KB 3270, KB 3275	0.757	6286700	K 32 L 21
22	95	38	44	11.0	KB 3270, KB 3275	0.739	6283870	K 32 L 22
24	95	40	44	13.0	KB 3270, KB 3275	0.706	6283950	K 32 L 24
27	95	41	44	13.0	KB 3270, KB 3275	0.655	6284090	K 32 L 27

Ø mm	L	d ₁	d ₂	t	recommended accessories	🔧	Code	No.
30	95	44	44	16.5	KB 3270, KB 3275	0.644	6284170	K 32 L 30
32	95	49	44	17.0	KB 3270, KB 3275	0.728	6284250	K 32 L 32
33	95	49	44	17.0	KB 3270, KB 3275	0.709	6286540	K 32 L 33 (3/4W)
34	95	52	44	19.0	KB 3270, KB 3275	0.858	6281660	K 32 L 34
36	95	52	44	19.0	KB 3270, KB 3275	0.826	6284330	K 32 L 36
41	95	57	44	22.0	KB 3270, KB 3275	0.811	6286890	K 32 L 41

IN K 32 IMPACT SCREWDRIVER BIT SOCKET 3/4"

for in-hex screws

- › Suitable for all standard electric and air tools
- › Square drive as per DIN 3121 - H 20, ISO 1174
- › GEDORE special steel, manganese-phosphated



mm	L ₁	L ₂	d	recommended accessories	kg	Code	No.
14	65	14	38	KB 3270, KB 3275	0.440	1956477	IN K 32 14
17	65	17	38	KB 3270, KB 3275	0.495	1956485	IN K 32 17
19	65	19	44	KB 3270, KB 3275	0.530	1956493	IN K 32 19
22	65	22	44	KB 3270, KB 3275	0.590	1956507	IN K 32 22
24	65	24	44	KB 3270, KB 3275	0.630	1956515	IN K 32 24
27	65	27	44	KB 3270, KB 3275	0.695	1956523	IN K 32 27

KB 3219 REDUCER 3/4" TO 1/2"

for impact sockets

- › With square drive as per DIN 3121, ISO 1174, Form F and H
- › GEDORE special steel, manganese-phosphated



"	"	"	"	mm	kg	Code	No.
3/4	20	1/2	12.5	65	0.351	6675280	KB 3219

KB 3221 CONVERTOR 3/4" TO 1"

for impact sockets

- › With square drive as per DIN 3121, ISO 1174, Form F and H
- › GEDORE special steel, manganese-phosphated



"	"	"	"	mm	kg	Code	No.
3/4	20	1	25	65	0.445	6671530	KB 3221

KB 3290 EXTENSION 3/4"

for impact sockets

- › With square drive as per DIN 3121, ISO 1174, Form F and H
- › GEDORE special steel, manganese-phosphated



KB 3290-8



KB 3290-12



KB 3290-16

"	"	mm	kg	Code	No.
3/4	20	205	0.957	6675600	KB 3290-8
3/4	20	300	1.328	6675790	KB 3290-12
3/4	20	400	1.759	6675870	KB 3290-16

KB 3295 UNIVERSAL JOINT 3/4"

for impact sockets

- › With square drive as per DIN 3121, ISO 1174, Form F and H
- › GEDORE special steel, manganese-phosphated



"	"	"	"	mm	kg	Code	No.
3/4	20	3/4	20	94	0.623	6676090	KB 3295

KB 3270 - KB 3275 SAFETY RING AND SAFETY PIN

for impact sockets 3/4"



KB 3270



KB 3275

Description	Ø	mm	kg	Code	No.
Safety ring d 36 mm	36		0.004	6675360	KB 3270
Safety pin d 4 mm	4	35	0.004	6675440	KB 3275

IMPACT-FIX LOCK

Your advantages

- › Integrated, secure two-pin lock including ring
- › An extra feature from GEDORE - for increased safety in the workplace
- › Particularly suitable for working in sensitive areas permanently governed by certainty against loss, process reliability and occupational safety
- › Examples: overhead power line construction, wind power plants, machine engineering or the automotive sector
- › Very safe and extremely practice-oriented, and very easy to handle
- › Double ring groove for easily sliding the ring
- › Minimisation of the risk of injury compared to standard systems available on the market. The securing ring is not catapulted out of the rotating insert if the securing pin tears.
- › Wherever major forces prevail, correct and appropriate securing and handling of tools is a key element of good screwed connections.
- › Standard practice: the bothersome and awkward fitting of the loose securing pin and ring is often simply neglected or forgotten, or the pin and ring are no longer to be found.
- › Thanks to the Impact-Fix lock integrated in the socket, 3 elements no longer need to be installed (insert, pin and ring). The securing pins and rings are always secured to the socket (3 in 1). The pins are automatically pressed into the drill holes in the square drive when the ring is secured in place.
- › DBGM (German utility patent)



3 in 1


THE ADVANTAGE IS OBVIOUS:

thanks to the Impact-Fix lock integrated in the socket, three elements no longer need to be installed (insert, pin and ring).







MACHINE- OR HAND-OPERATED...

... electric, hydraulic, pneumatic or with torque multiplier by hand

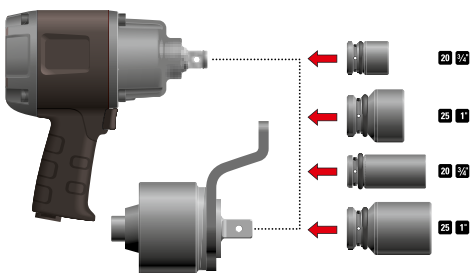

EASY TO USE ...



Double ring groove for easily sliding the ring thanks to integrated two-pin lock including ring.


25 (1") square drive

K 21 S

IMPACT SOCKET 1" WITH IMPACT-FIX LOCK

hexagon UD profile

- > Acc. to DIN 3129, ISO 2725-2
- > Machine-operated, suitable for all standard electric and air tools
- > Square drive as per DIN 3121 - H 25, ISO 1174
- > GEDORE vanadium steel 59CrV4
- > Gun-metal finish
- > DBGM (German utility patent)
- > Particularly suitable for working in sensitive areas permanently governed by certainty against loss, process reliability and occupational safety
- > Examples: overhead power line construction, wind power plants or the automotive sector



mm	L	d ₁	d ₂	t	kg	Code	No.
22	55	40.4	54	9.8	0.600	2734443	K 21 S 22
24	55	42.9	54	11.2	0.600	2734451	K 21 S 24
27	55	46.7	54	12.6	0.600	2734478	K 21 S 27
30	57	50.4	54	14.0	0.600	2734486	K 21 S 30
32	57	52.9	54	15.4	0.600	2734494	K 21 S 32
33	57	54.0	54	15.4	0.600	2734508	K 21 S 33
34	57	55.4	54	15.4	0.600	2734516	K 21 S 34
36	60	57.9	54	16.8	0.680	2734524	K 21 S 36
38	64	60.4	54	16.8	0.700	2734540	K 21 S 38
41	64	64.2	54	18.9	0.700	2734559	K 21 S 41


mm	L	d ₁	d ₂	t	kg	Code	No.
42	64	65.4	54	18.9	0.700	2734567	K 21 S 42
46	69	70.4	54	21.0	0.700	2734575	K 21 S 46
50	72	75.4	54	23.1	0.800	2734583	K 21 S 50
55	76	81.7	54	25.2	0.800	2734591	K 21 S 55
60	82	87.9	54	27.3	0.800	2734605	K 21 S 60
65	85	94.2	54	29.4	0.900	2734613	K 21 S 65
70	88	100.4	54	31.5	0.900	2734621	K 21 S 70
75	92	106.0	54	33.6	0.900	2734648	K 21 S 75
80	97	113.0	54	36.4	1.000	2734656	K 21 S 80

K 21 SL

IMPACT SOCKET 1" WITH IMPACT-FIX LOCK

hexagon UD profile, long pattern

- > Machine-operated, suitable for all standard electric and air tools
- > Square drive as per DIN 3121 - H 25, ISO 1174
- > GEDORE vanadium steel 59CrV4
- > Gun-metal finish
- > DBGM (German utility patent)
- > Particularly suitable for working in sensitive areas permanently governed by certainty against loss, process reliability and occupational safety
- > Examples: overhead power line construction, wind power plants or the automotive sector



mm	L	d ₁	d ₂	t	kg	Code	No.
22	100	40.4	54	9.8	0.600	2734664	K 21 SL 22
24	100	42.9	54	11.2	0.600	2734672	K 21 SL 24
27	100	46.7	54	12.6	0.600	2734680	K 21 SL 27
30	100	50.4	54	14.0	0.800	2734699	K 21 SL 30
32	100	52.9	54	15.4	0.800	2734702	K 21 SL 32
33	100	54.0	54	15.4	0.800	2734710	K 21 SL 33
34	100	55.4	54	15.4	1.000	2734729	K 21 SL 34
36	100	57.9	54	16.8	1.000	2734737	K 21 SL 36


mm	L	d ₁	d ₂	t	kg	Code	No.
38	100	60.4	54	16.8	1.140	2734745	K 21 SL 38
41	100	64.2	54	18.9	1.280	2734753	K 21 SL 41
46	100	70.4	54	18.9	1.420	2734761	K 21 SL 46

K 21 (MM)

IMPACT SOCKET 1"

hexagon

- Acc. to DIN 3129, ISO 2725-2
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174
- GEDORE special steel, gun-metal finish
- Use KB 3770 and KB 3775 from 75 mm and up
* not standardised



Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
22	60	40	54	11.0	KB 2170, KB 2175	0.561	6183060	K 21 22
24	60	42	54	13.0	KB 2170, KB 2175	0.611	6183140	K 21 24
27	60	46	54	13.0	KB 2170, KB 2175	0.614	6183220	K 21 27
30	58	50	54	16.5	KB 2170, KB 2175	0.619	6183300	K 21 30
32	62	51	54	17.0	KB 2170, KB 2175	0.608	6183490	K 21 32
33	60	54	54	17.0	* KB 2170, KB 2175	0.615	6183650	K 21 33
34	62	54	54	19.0	KB 2170, KB 2175	0.624	6196980	K 21 34
36	67	54	54	19.0	KB 2170, KB 2175	0.598	6183570	K 21 36
38	67	60	54	19.0	* KB 2170, KB 2175	0.764	6184890	K 21 38
41	67	63	54	22.0	KB 2170, KB 2175	0.794	6183730	K 21 41


Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
42	74	63	54	22.0	* KB 2170, KB 2175	0.781	6184970	K 21 42
46	74	70	54	25.5	KB 2170, KB 2175	0.974	6183810	K 21 46
50	80	73	54	27.0	KB 2170, KB 2175	1.018	6184030	K 21 50
55	84	82	54	30.0	KB 2170, KB 2175	1.298	6184110	K 21 55
60	87	86	54	33.0	KB 2170, KB 2175	1.481	6184380	K 21 60
65	90	92	54	35.0	KB 2170, KB 2175	1.682	6184460	K 21 65
70	96	96	54	38.0	KB 2170, KB 2175	1.812	6184540	K 21 70
75	98	100	86	41.0	* KB 3770, KB 3775	2.690	6184620	K 21 75
80	100	105	86	44.0	* KB 3770, KB 3775	2.936	6184700	K 21 80

K 21 (AF)

IMPACT SOCKET 1"

hexagon

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174
- GEDORE special steel, gun-metal finish



Ø "AF"	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
1	55	43	54	13.0	KB 2170, KB 2175	0.611	6186320	K 21 1AF
1.1/4	57	51	54	17.0	KB 2170, KB 2175	0.614	6186400	K 21 1.1/4AF
1.7/16	60	54	54	19.0	KB 2170, KB 2175	0.593	6186590	K 21 1.7/16AF
1.1/2	64	60	54	22.0	KB 2170, KB 2175	0.776	6186750	K 21 1.1/2AF


Ø "AF"	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
1.5/8	64	63	54	22.0	KB 2170, KB 2175	0.796	6186670	K 21 1.5/8AF
1.13/16	69	70	54	25.5	KB 2170, KB 2175	0.972	6186830	K 21 1.13/16AF
1.7/8	72	70	54	27.0	KB 2170, KB 2175	0.981	6186910	K 21 1.7/8AF
2.1/4	80	82	54	33.0	KB 2170, KB 2175	1.365	6187050	K 21 2.1/4AF

K 21 L

IMPACT SOCKET 1"

hexagon, long pattern

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174
- GEDORE special steel, gun-metal finish



Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
22	100	40	54	11.0	KB 2170, KB 2175	1.103	6185350	K 21 L 22
24	100	42	54	13.0	KB 2170, KB 2175	1.234	6185430	K 21 L 24
27	100	46	54	13.0	KB 2170, KB 2175	1.227	6185510	K 21 L 27
30	100	50	54	16.5	KB 2170, KB 2175	1.141	6185780	K 21 L 30
32	100	51	54	17.0	KB 2170, KB 2175	1.101	6185860	K 21 L 32
33	100	54	54	17.0	KB 2170, KB 2175	1.104	6197950	K 21 L 33

Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
34	100	54	54	19.0	KB 2170, KB 2175	1.189	6197010	K 21 L 34
36	100	54	54	19.0	KB 2170, KB 2175	1.022	6185940	K 21 L 36
38	100	60	54	22.0	KB 2170, KB 2175	1.262	6186080	K 21 L 38
41	100	63	54	22.0	KB 2170, KB 2175	1.420	6186160	K 21 L 41
46	100	70	54	25.5	KB 2170, KB 2175	1.619	6186240	K 21 L 46

IN K 21

IMPACT SCREWDRIVER BIT SOCKET 1"

for in-hex screws

- Suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 25, ISO 1174
- GEDORE special steel, manganese-phosphated




mm	L ₁	L ₂	d	recommended accessories	kg	Code	No.
19	75	21	54	KB 2170, KB 2175	0.650	1956558	IN K 21 19
22	75	24	54	KB 2170, KB 2175	0.675	1956566	IN K 21 22
24	75	26	54	KB 2170, KB 2175	0.700	1956574	IN K 21 24
27	75	28	54	KB 2170, KB 2175	0.730	1956582	IN K 21 27
30	75	29	54	KB 2170, KB 2175	0.770	1577514	IN K 21 30
32	75	30	54	KB 2170, KB 2175	0.900	1956590	IN K 21 32
36	75	30	54	KB 2170, KB 2175	0.860	1956604	IN K 21 36

KB 2132

REDUCER 1" TO 3/4"

for impact sockets

- Square drive as per DIN 3121, ISO 1174, Form F and H
- GEDORE special steel, manganese-phosphated

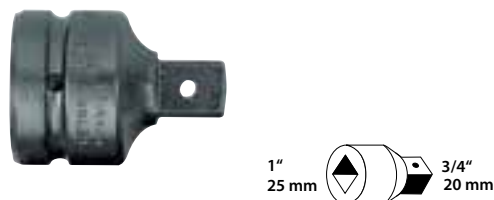

"		"		mm	kg	Code	No.
1	25	3/4	20	75	0.661	6657460	KB 2132

KB 2190

EXTENSION 1"

for impact sockets

- Square drive as per DIN 3121, ISO 1174, Form F and H
- GEDORE special steel, manganese-phosphated



"		mm	kg	Code	No.
1	25	208	1.477	6657970	KB 2190-8
1	25	300	2.010	6658000	KB 2190-12
1	25	405	2.587	6658190	KB 2190-16

KB 2137

CONVERTOR 1" TO 1.1/2"

for impact sockets

- Square drive as per DIN 3121, ISO 1174, Form F and H
- GEDORE special steel, manganese-phosphated



"		"		mm	kg	Code	No.
1	25	1.1/2	40	82	0.988	6657890	KB 2137

KB 2195

UNIVERSAL JOINT 1"

for impact sockets

- Square drive as per DIN 3121, ISO 1174, Form F and H
- GEDORE special steel, manganese-phosphated




"		"		mm	kg	Code	No.
1	25	1	25	140	1.425	6658350	KB 2195

KB 2170 - KB 2175

SAFETY RING AND SAFETY PIN 1"

for impact sockets 1"

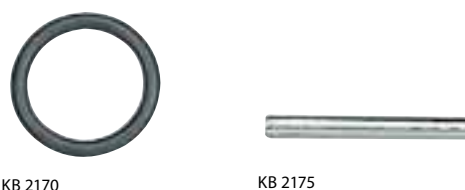


Description	Ø	mm	kg	Code	No.
Safety ring d 45 mm	45		0.008	6657620	KB 2170
Safety pin d 5 mm	5	45	0.007	6657700	KB 2175

40 (1.1/2") square drive

K 37 IMPACT SOCKET 1.1/2"

hexagon

- Acc. to DIN 3129, ISO 2725-2
- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 40, ISO 1174
- GEDORE special steel, gun-metal finish
- Use KB 6470 and KB 6475 from 95 mm and up
- * not standardised




Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
46	84	76	86	25.5	KB 3770, KB 3775	2.3	6328130	K 37 46
50	87	81	86	27.0	* KB 3770, KB 3775	2.3	6328210	K 37 50
55	90	86	86	30.0	KB 3770, KB 3775	2.5	6328480	K 37 55
60	92	93	86	33.0	KB 3770, KB 3775	2.7	6328560	K 37 60
65	95	97	86	35.0	KB 3770, KB 3775	3.2	6328640	K 37 65
70	100	105	86	38.0	KB 3770, KB 3775	3.5	6328720	K 37 70
75	103	110	86	41.0	KB 3770, KB 3775	3.7	6328800	K 37 75
80	110	116	86	44.0	KB 3770, KB 3775	4.2	6328990	K 37 80
85	118	125	86	47.0	KB 3770, KB 3775	4.8	6329020	K 37 85

Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
90	118	130	86	49.0	KB 3770, KB 3775	5.5	6329100	K 37 90
95	118	137	95	49.0	* KB 6470, KB 6475	9.0	6329290	K 37 95
100	125	140	127	54.0	* KB 6470, KB 6475	8.1	6329370	K 37 100
105	125	150	127	54.0	* KB 6470, KB 6475	9.3	6329450	K 37 105
110	137	156	127	62.0	* KB 6470, KB 6475	10.6	6329530	K 37 110
115	137	160	127	67.0	* KB 6470, KB 6475	10.6	6329610	K 37 115
120	145	168	127	67.0	* KB 6470, KB 6475	11.8	6329880	K 37 120

K 37 L IMPACT SOCKET 1.1/2"

hexagon, long pattern

- Machine-operated, suitable for all standard electric and air tools
- Square drive as per DIN 3121 - H 40, ISO 1174
- GEDORE special steel, gun-metal finish
- Use KB 6470 and KB 6475 from 95 mm and up



Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
41	140	70	86	22.0	KB 3770, KB 3775	4.4	6330110	K 37 L 41
46	140	75	86	25.5	KB 3770, KB 3775	4.3	6330380	K 37 L 46
50	140	80	86	27.0	KB 3770, KB 3775	4.4	6330460	K 37 L 50
55	140	86	86	30.0	KB 3770, KB 3775	4.0	6330540	K 37 L 55
60	140	92	86	33.0	KB 3770, KB 3775	4.1	6330620	K 37 L 60
65	140	100	86	35.0	KB 3770, KB 3775	4.6	6330700	K 37 L 65
70	140	105	86	38.0	KB 3770, KB 3775	4.8	6330890	K 37 L 70
75	140	109	86	41.0	KB 3770, KB 3775	5.4	6330970	K 37 L 75
80	140	115	86	44.0	KB 3770, KB 3775	5.7	6331000	K 37 L 80

Ø mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
85	140	121	86	47.0	KB 3770, KB 3775	6.2	6331190	K 37 L 85
90	140	130	86	49.0	KB 3770, KB 3775	6.6	6331270	K 37 L 90
95	150	137	127	49.0	KB 6470, KB 6475	10.0	6331350	K 37 L 95
100	150	144	127	54.0	KB 6470, KB 6475	10.0	6331430	K 37 L 100
105	150	154	127	54.0	KB 6470, KB 6475	11.3	6331510	K 37 L 105
110	160	157	127	62.0	KB 6470, KB 6475	12.8	6331780	K 37 L 110
115	160	164	127	67.0	KB 6470, KB 6475	12.2	6331860	K 37 L 115
120	170	167	127	67.0	KB 6470, KB 6475	13.8	6331940	K 37 L 120

KB 3721 REDUCER 1.1/2" TO 1"

for impact sockets

- Square drive as per DIN 3121, ISO 1174, Form F and H
- GEDORE special steel, gun-metal finish



□ "	□	■ "	■	□ mm	kg	Code	No.
1.1/2	40	1	25	95	1.992	6676410	KB 3721

KB 3764

CONVERTOR 1.1/2" TO 2.1/2"

for impact sockets

- > Square drive as per DIN 3121, ISO 1174, Form F and H
- > GEDORE special steel, gun-metal finish



□"	□	■"	■	Ø	l-mm	kg	Code	No.
1.1/2	40	2.1/2	63	86	93	3.6	1531220	KB 3764

KB 3770 - KB 3775

SAFETY RING AND SAFETY PIN

for impact sockets 1.1/2"



KB 3770



KB 3775

Description	Ø	l-mm	kg	Code	No.
Safety ring d 75 mm	75		0.026	6676760	KB 3770
Safety pin d 6 mm	6	75	0.017	6676840	KB 3775


63 (2.1/2") square drive

K 64

IMPACT SOCKET 2.1/2"

hexagon

- > Acc. to DIN 3129, ISO 2725-2
- > Machine-operated, suitable for all standard electric and air tools
- > Square drive as per DIN 3121 - H 63, ISO 1174
- > GEDORE special steel, gun-metal finish
- * not standardised



Ø-mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
75	125	115	127	41	KB 6470, KB 6475	7.4	6371300	K 64 75
80	125	115	127	44	KB 6470, KB 6475	7.0	6371490	K 64 80
85	130	127	127	47	KB 6470, KB 6475	7.3	6371570	K 64 85
90	132	135	127	49	KB 6470, KB 6475	8.0	6371650	K 64 90
95	132	140	127	49	KB 6470, KB 6475	8.1	6371730	K 64 95

Ø-mm	L	d ₁	d ₂	t	recommended accessories	kg	Code	No.
100	141	145	127	54	KB 6470, KB 6475	8.9	6371810	K 64 100
105	141	150	127	54	KB 6470, KB 6475	9.1	6372030	K 64 105
110	150	160	127	62	KB 6470, KB 6475	11.0	6372110	K 64 110
115	150	165	127	62	KB 6470, KB 6475	11.1	6372380	K 64 115
120	158	170	127	67	* KB 6470, KB 6475	12.0	6372460	K 64 120

KB 6437

REDUCER 2.1/2" TO 1.1/2"

for impact sockets

- > Square drive as per DIN 3121, ISO 1174, Form F and H
- > GEDORE special steel, gun-metal finish



□"	□	■"	■	l-mm	kg	Code	No.
2.1/2	63	1.1/2	40	138	7.090	6699700	KB 6437

KB 6470 - KB 6475

SAFETY RING AND SAFETY PIN

for impact sockets 2.1/2"



KB 6470




KB 6475

Description	Ø	l-mm	kg	Code	No.
Safety ring d 114 mm	114		0.040	6699890	KB 6470
Safety pin d 8 mm	8	110	0.043	6699970	KB 6475

Impact driver

K 1900
HAND-OPERATED IMPACT DRIVER 1/2"

- > Particularly suitable for loosening tight bolts or screws with the aid of a hammer
- > Reversible for right and left hand operation
- > Will fit any 1/2" impact socket or bit
- > Manganese-phosphated



"		L	d	kg	Code	No.
1/2	12.5	123	34	0.579	6654440	K 1900

K 1900-018
HAND-OPERATED IMPACT DRIVER SET 1/2"

18 pieces



- > Complete with the most frequently used bits, for use on screws and bolts with slotted, cross-head or hexagon heads
- > Reversible for right and left hand operation
- > In plastic case
- > Dimensions: 200 x 120 x 38 mm
- > TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Contents	kg	Code	No.
⊖ 880 5,5 6,5 8 12	1.249	6654600	K 1900-018
● 885 4 5 6 8 10			
⊕ 890 2 3 4			
⊗ 887 TX T27 T30 T40 T45			
KB 819			
K 1900			

1500 ES-K 1900

>101